


## Constant Current LED Driver LED恒流驅動器

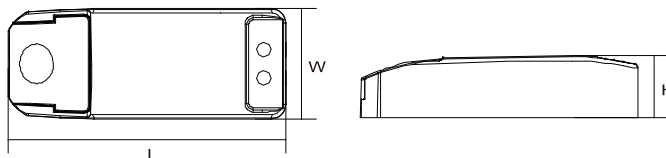

### Product Features:

- Independent compact design
- Easy press cable lock
- Captured terminal screws
- Safe no-load operation
- Overload protection
- Short circuiting protection
- Overheating protection
- Simple installation
- SELV equivalent
- Protection class II
- 50,000 hrs service life time

### 產品特點:

- 超小體積，獨立式緊湊型設計
- 簡便自鎖式壓線蓋
- 螺絲鎖緊大接線端子，方便多規格線接駁
- 安全無負載保護裝置
- 輸出過載保護
- 輸出短路保護
- 過溫保護功能
- 安裝經濟便捷
- 符合安全特低電壓標準
- 保護等級 II
- 50,000小時長壽命設計



Model No. 型號	Input Voltage 額定電壓 (V)	Max. Output Power 功率 (W)	Output Current 輸出電流 (mA)	Output Voltage 輸出電壓 (V)	Power Factor 功率因數 (入)	Ambient Temperature 環境溫度 ta (°C)	Casing Temperature 最大外殼溫度 tc (°C)	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)	Wiring Diagram 接線圖
EGL350mA/3W	100-240	3	350	2-9	0.60	-20...+50	75	81x39x22	50	A
EGL350mA/6W	100-240	6	350	2-18	0.60	-20...+50	75	98x39x22	60	A
EGL350mA/12W	220-240	12	350	2-34	0.60	-20...+50	75	113x44x28	100	A
EGL500mA/3W	100-240	3	500	2-6	0.60	-20...+50	75	81x39x22	50	A
EGL500mA/6W	100-240	6	500	2-12	0.60	-20...+50	75	98x39x22	60	A
EGL500mA/16W	220-240	16	500	2-34	0.60	-20...+45	75	113x44x28	100	A
EGL700mA/3W	100-240	3	700	2-5	0.60	-20...+50	75	81x39x22	50	A
EGL700mA/6W	100-240	6	700	2-9	0.60	-20...+50	75	98x39x22	60	A
EGL700mA/17W	220-240	17	700	2-27	0.60	-20...+45	75	113x44x28	100	A
EGL1050mA/6W	100-240	6	1050	2-4	0.60	-20...+50	75	98x39x22	60	A
EGL1050mA/17W	220-240	17	1050	2-16	0.60	-20...+40	75	113x44x28	100	A

### Standards 標準

- EN 61347-1
- EN 61347-2-13
- EN 55015
- EN 61000-3-2
- EN 61000-3-3
- EN 61547

